

Key Features


- Ideal for outside cabling application
- Armored steel tape for rodent resistance
- Pressure resistance
- Fully water-blocked
- Moisture blocking loose tubes
- Fiber 2 core
- Easy Operation, reliable and cost-effective

This is armored fiber optic patch cord with 2 fibers, which is designed ideal for CPRI cabling system.


Applications

- FTTA & FTTH
- Base station, BTS installation, BBU to RRU
- Indoor/outdoor building cabling
- Harsh environments application
- Long haul networking
- Direct burial and aerial lashing

Structure

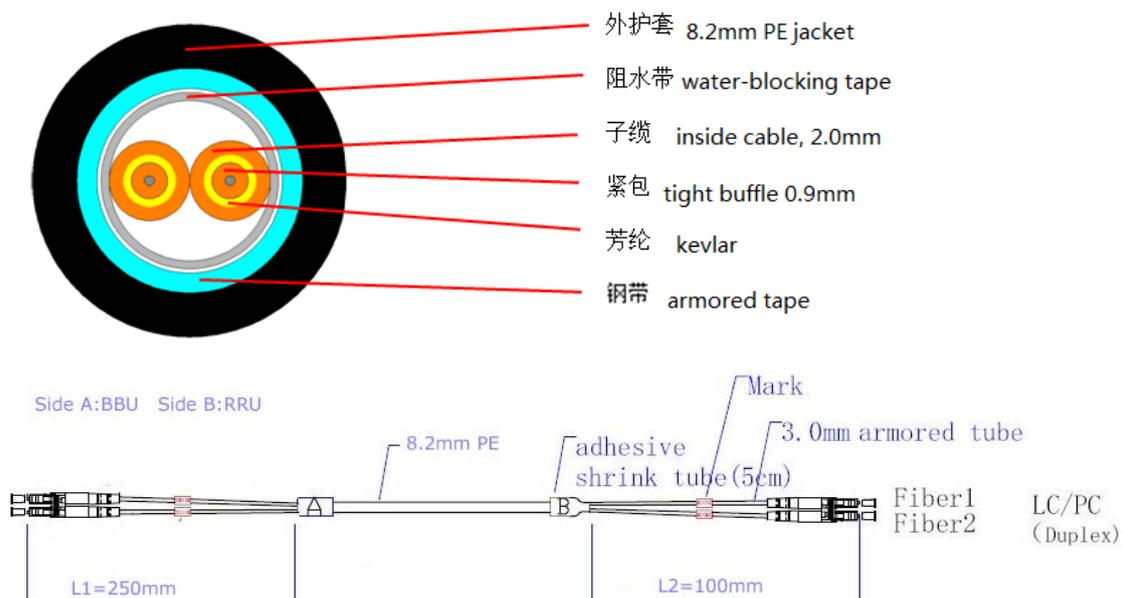

Item	Specifications
Connector A	Duplex LC, beige color
Connector B	Duplex LC, beige color
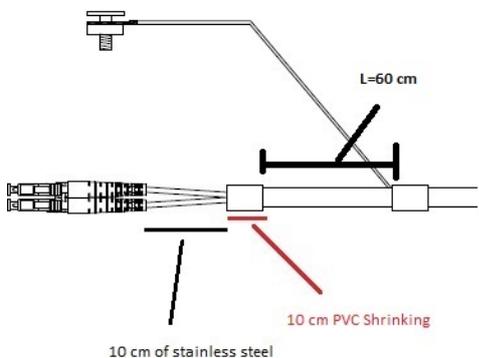
<p>Grounding cable</p>	<p>Grounding cable on RRU side, length 1m, joint point 0.6m to end</p> <p style="text-align: center;">Grounding Kit 1m</p> 
<p>Cable length</p>	<p>75m</p>
<p>Fan out armored connector length Side A</p>	<p>250mm</p>
<p>Fan out armored connector length Side B</p>	<p>100mm</p>
<p>Protection of LC connector</p> 	<p>This black tube is used to protect LC connector.</p>
<p>Fiber amount</p>	<p>2 cores</p>
<p>Fiber type</p>	<p>Multi-mode 50/125um</p>
<p>Optical Cable Attenuation at 850nm</p>	<p>3.5dB/km</p>
<p>Optical Cable Attenuation at 1300nm</p>	<p>1.5dB/km</p>
<p>IL/Connector</p>	<p>≤0.3dB</p>
<p>Return Loss/Connector</p>	<p>35dB</p>
<p>Operation Temperature Range</p>	<p>-40-70°C</p>
<p>Tensile strength</p>	<p>350 N maximum</p>
<p>Bending radius</p>	<p>180mm minimum</p>
<p>Crush Resistance</p>	<p>1500 N/100 mm</p>
<p>Outer sheath</p>	<p>PE</p>
<p>Cable sheath color</p>	<p>Black</p>
<p>Cable OD</p>	<p>8.2mm +/-0.3mm, full cable armored</p>
<p>Fan out</p>	<p>3.0mm OD, armored</p>